

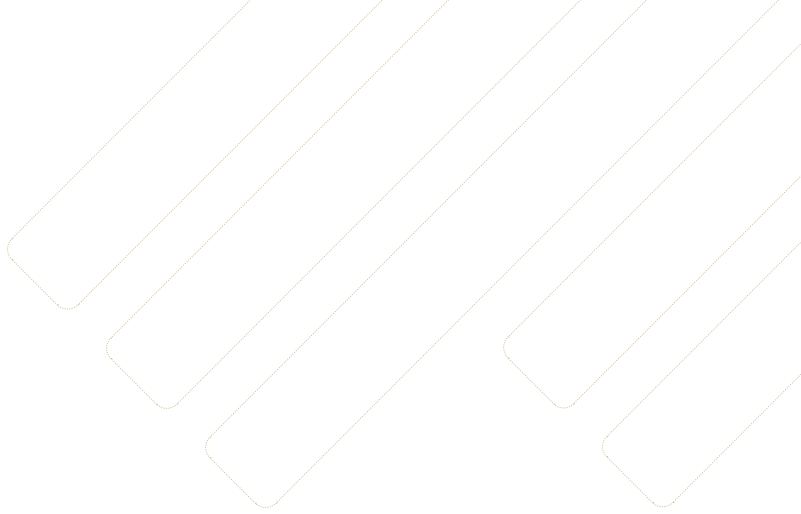




TERAFEST  
FENCES

## PROFILES




## PROPERTIES

profile	texture	dimensions	standard length	custom length	weight
fence 90* basic colour	FOREST/FOREST	90 × 15 mm	-	1,3 – 3,6 m	1,65 kg/bm
fence 120 basic colour	FOREST/FOREST	120 × 11 mm	-	1,3 – 3,6 m	1,65 kg/bm
fence 120 PLUS colour	FOREST/FOREST	120 × 11 mm	3,6 m	1,3 – 3,6 m	1,65 kg/bm

\* Fence profile 90 is not available in colour options marked **+**  
Dimensional tolerance: length +/- 10 mm; width +/- 2 mm; thickness +/- 1 mm.

## COLOUR OPTIONS

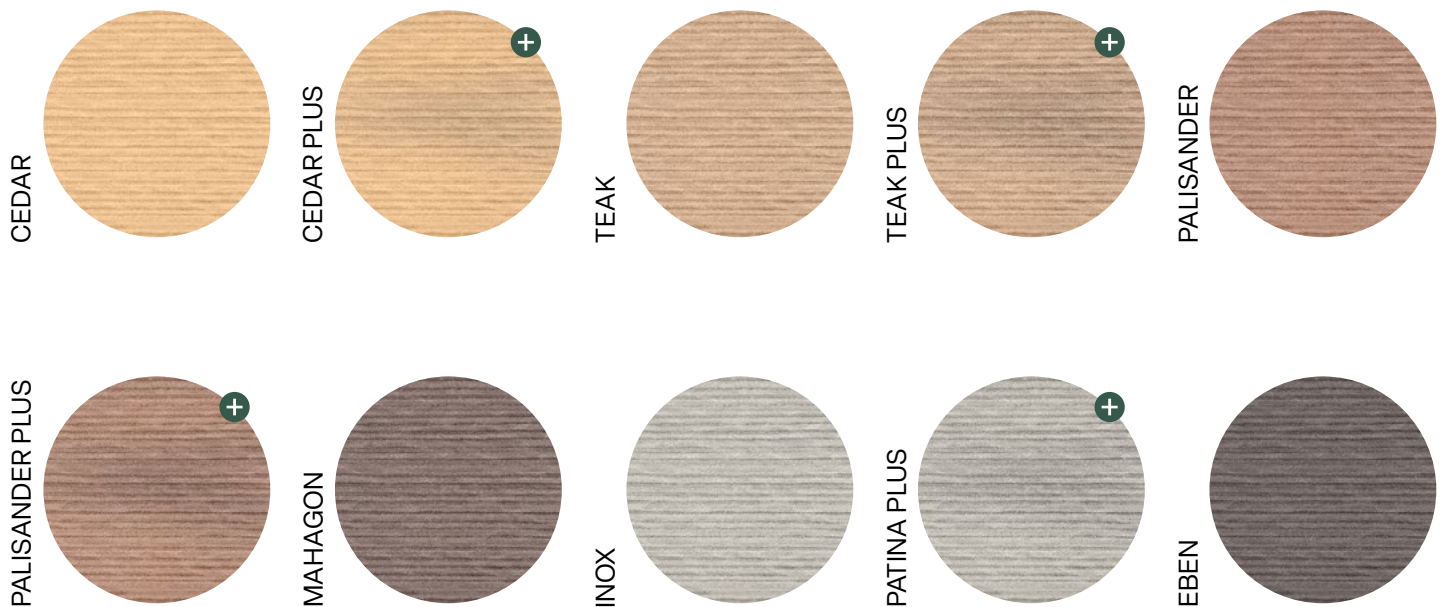

The colour variants marked **+** have a unique color annealing, which breaks up the color monotony in the area and adds to the attractiveness of the fences.

### Technical properties of the TERAFFEST® Fence 90 and 120 profile

Basic characteristics	Property	Standard
Max. distance of supports	800mm	
Swelling in thickness	2,6 %	ČSN EN 317
Water absorption	3,1%	ČSN EN 317
Shrinkage after heat stress	0%	ČSN EN 479-2018
Impact resistance 23°C and -10°C	10 J – pass	ČSN EN 477
Cadmium content	>1 mg/kg	
Thermal expansion +30 up to +80 °C	$2,57 \cdot 10^{-5} \text{ K}^{-1}$	
Surface hardness	91 N/mm <sup>2</sup>	
Density	1,21-1,24 g/cm <sup>3</sup>	
Thermal conductivity	0,072 W/(m*K)	